

VST temperature sensor

For alternative drive and storage systems

DESCRIPTION

The VST temperature sensor is used in applications that require a high degree of flexibility and special adjustments. The compact design and use of media-specific materials makes the VST ideal for use in applications with critical installation space requirements and under harsh ambient conditions. The specially developed measurement element not only guarantees fast response times, but also highly accurate results. The sensors are available in a resistive configuration with an NTC element or PT100/ PT1000 element. As a transmitter version with a linearised, analogue output signal, the VST also offers electrical protective and diagnostic functions, which are typical for the automotive industry.



FIELDS OF APPLICATION

- Tank and storage systems
- H₂ application and special media
- Cooling water systems
- Fuel cells



© LindePR

KEY FEATURES

Specially developed measurement element and evaluation electronics

Use of media-tested materials

Compact design

BENEFITS

- Fast response times
- High degree of accuracy
- Transmitter version with voltage output available

- Excellent media compatibility
- Suitable for high ambient temperatures

- Suitable for high ambient pressures
- Ideal for integration in applications with critical installation space requirements

Technical specification

VST temperature sensor



Measurement range

Measurement range -55 ... 250 °C

Measuring element NTC
PT100/PT1000

Electrical characteristics

Supply voltage ¹⁾ 5 V

Output signal NTC standard resistor signal ²⁾
PT100/PT1000
0.5 ... 4.5 V, ratiometric

Overvoltage protection ¹⁾ ± 30 V

Reverse polarity protection ¹⁾ for all pins

Mechanical characteristics

Material connector PPS

Wetted parts 1.4404 stainless steel

Mechanical connection HEX 19, M10x1
male thread ³⁾

Electrical connection MQS plug ⁴⁾

Installation position Arbitrary

Weight Approx. 20 g

Accuracy

Total error < 0.5 K (25 °C)

Response time (t₉₀) ≥ 1.5 s (in liquid medium)

Environmental conditions

Media temperature range -55 ... 250 °C


Ambient temperature range -40 ... 200 °C ⁵⁾

Ambient pressure range 0 ... 500 bar

Media compatibility Various oils, DI-H₂O, H₂

ESD Handling ± 3 kV to contacts
(ISO 10605-5-2) ± 8 kV to case

Dimension

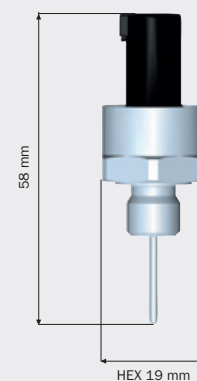

1) Valid for the transmitter version with voltage output
2) NTC standard means RN at 25 °C in a range from 2 ... 100 kΩ; others available on request
3) Other threads available on request
4) Other electrical connections available on request
5) Only valid for resistance output